


## ANALISIS GRANULOMETRICOS

MUESTRA: IP69


UTM X: 617651

UTM Y: 3192407

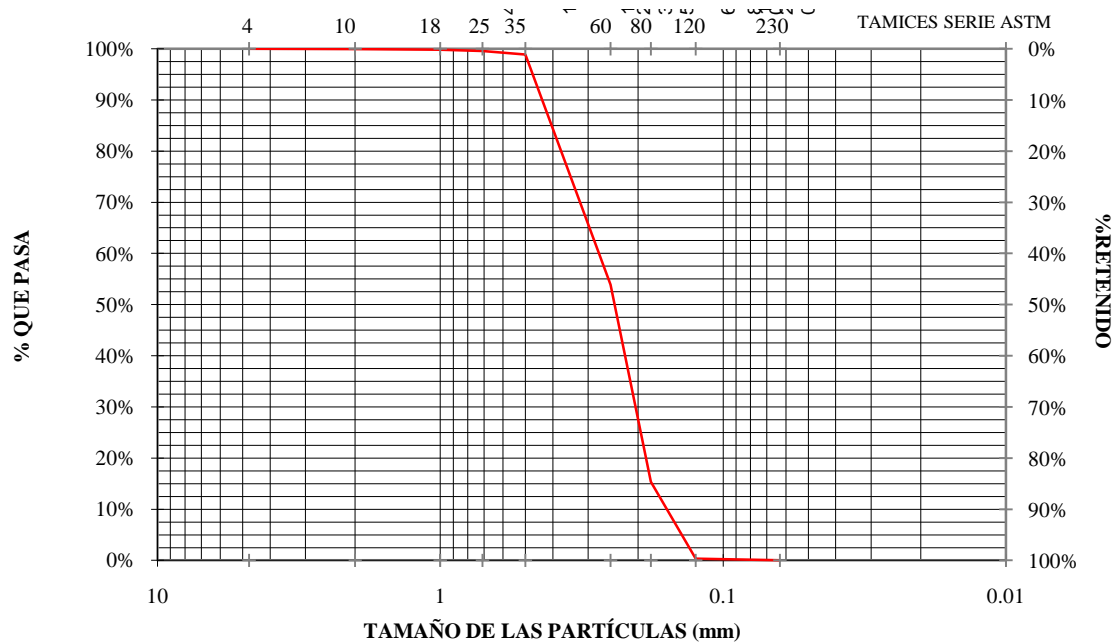

TAMICES ASTM		Peso retenido (gramos)	% Retenido	% Que pasa
n°4	4.75 mm	0.00 ( 0 %C)	0.0%	100.0%
n°10	2 mm	0.06 ( 25 %C)	0.1%	99.9%
n°18	1 mm	0.12 ( 50 %C)	0.2%	99.8%
n°25	0.71 mm	0.24 ( 75 %C)	0.4%	99.6%
n°35	0.5 mm	0.71 ( 0 %C)	1.1%	98.9%
n°60	0.25 mm	44.96 ( 0 %C)	46.1%	53.9%
n°80	0.18 mm	38.54 ( 0 %C)	84.6%	15.4%
n°120	0.125 mm	15.03 ( 0 %C)	99.6%	0.4%
n°230	0.063 mm	0.35 ( 0 %C)	100.0%	0.0%
Finos	<0,063 mm	0.00 ( 0 %C)	100.0%	0.0%

% FINOS	0.00%
% CASCAJO	0.25%
<b>D16</b>	0.416
<b>D50</b>	0.243
<b>D84</b>	0.181
<b>Media</b>	0.280
<b>σ</b>	0.118
<b>M. distribuc.</b>	0.299

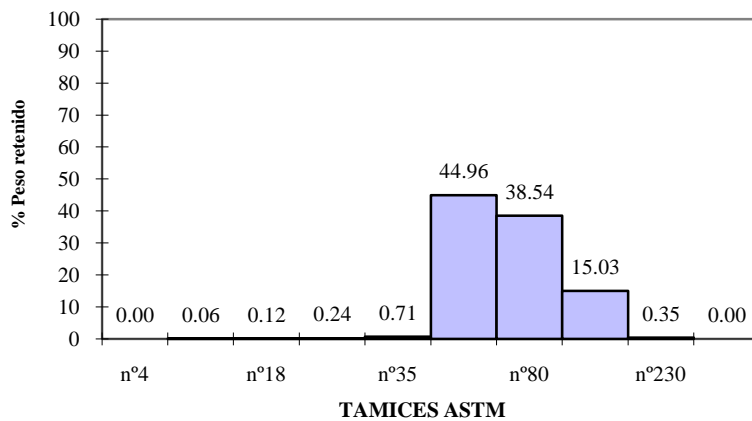

### MODA ARENAS FINAS

	D50	
Cantos y gravas	>2	mm
Arena muy gruesa	1-2	mm
Arena gruesa	0,5-1	mm
Arena media	0,25-0,5	mm
Arena fina	0,125-0,25	mm
Arena muy fina	0,062-0,125	mm
Fango	<0,062	mm